




SKID STEER LOADERS

RADIAL & VERTICAL LIFT



2012 ▲ 1050R ▲ 2041 ▲ 1350R ▲ 1500R ▲ 1650R ▲ 1900R ▲ 2200R ▲ 2600R
2700V NXT2 ▲ 3300V NXT2

A LEGACY OF INNOVATION

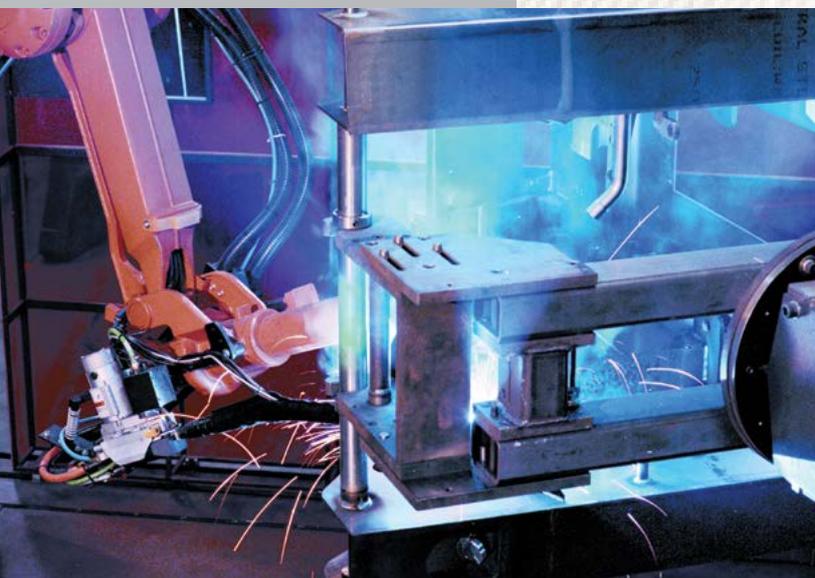

WHAT BEGAN IN THE 19TH CENTURY AS AN AGRICULTURAL IMPLEMENT MANUFACTURER HAS GROWN INTO A 21ST CENTURY EQUIPMENT POWERHOUSE - MUSTANG COMPACT EQUIPMENT.

Known in the early years as the Owatonna Manufacturing Company, Mustang was among the first to make what is known today as the skid steer loader. Since that time, Mustang has combined old-school experience with innovative processes to offer one of the broadest lines of compact equipment available today.

MUSTANG. THE ORIGINAL WORKHORSE.



SKID STEERS: LEADING THE HERD

Building its first skid steer loader in 1965, Mustang was a true pioneer in the equipment world. Almost fifty years later, Mustang continues the tradition with one of the most complete lines of skid steer loaders on the market today.

With eleven models ranging from 386 kg to an industry-leading 1814 kg of operating capacity, Mustang offers both radial- and vertical-lift models.



RADIAL LIFT



2012



1050R



2041



1350R



1500R



1650R



1900R

VERTICAL-LIFT



2200R



2600R



2700V
NXT2



3300V
NXT2

RADIAL-LIFT & VERTICAL-LIFT

▲ RADIAL-LIFT and ▲ VERTICAL-LIFT

LOADING OR LIFTING - WE HAVE THE MACHINE FOR YOU

RADIAL LIFT

Offers enhanced performance in excavating, grading and digging below grade applications. Due to the radial lift path, the maximum reach is greater at the middle of the lift height.

SINGLE PIN DESIGN

Provides superior durability in loading and pushing applications.

DURABLE BUILD

Up to 114 mm width lift arm construction delivers superior strength and rigidity.



EXCELLENT FORWARD REACH

The Mustang radial lift skid steer loaders provide excellent forward reach at the middle of the lift path. This provides excellent performance for loading flatbed trucks, backfilling or dumping over a wall.



VERTICAL LIFT

Providing more reach at full lift height is optimal for applications that require loading and stacking at high heights. By keeping the load closer to the machine, lift capacities are increased over radial-lift models.

SINGLE PLANE LIFT ARM

Design features large diameter pins aligned in a single plane for best-in-class vertical and lateral strength and rigidity.



lift heights from 3310 mm to 3332 mm



X-TYPE

Upper-rear channel support welded to the top and between the load arms provides added rigidity without obstructing rear visibility.

VERTICAL

The 2700V NXT2 and 3300V NXT2 have a near vertical path.



SMALL FRAME SKID STEER LOADERS

▲ **POWER** and ▲ **PERFORMANCE**

COMPACT POWERHOUSES: 2012, 1050R & 2041



RATED OPERATING CAPACITY

2012	386 kg
1050R	484 kg
2041	612 kg

LOW-PROFILE LIFT ARM

A high-strength, low-profile design maximizes operator visibility for added performance and safety.



SELF-LEVELING

Hydraulic self-leveling is available as an option.



LIFT HEIGHT

2012	2438 mm
1050R	2746 mm
2041	2794 mm

LOW OVERALL HEIGHT

Gain access to low clearance sites and buildings.

2012	1897 mm
1050R	1786 mm
2041	1826 mm





LEVEL II FOPS

Robust operator station design provides added protection for the operator.

EASY TRANSPORT

With an operating weight of only 1905 kg, the 1050R can be easily towed on a trailer behind a standard truck.



LOW PROFILE DESIGN

Low profile design and narrow width make working in small spaces easy.

COUNTERWEIGHT/BUMPER

The optional counterweight can increase the operating capacity.

2012	N/A
1050R	533 kg
2041	669 kg



NARROW WIDTH

A narrow wheel offset option allows entry through a backyard gate.

2012	909 kg
1050R	1229 kg
2041	1346 kg

YANMAR STAGE 3A ENGINES

Yanmar Stage 3A 3-cylinder naturally-aspirated engine provides the power you need.

2012	18 kW	86 Nm
1050R	25.5 kW	108 Nm
2041	35 kW	145 Nm

MID-FRAME SKID STEER LOADERS

▲ **POWER** and ▲ **PERFORMANCE**

MID-SIZED MUSCLE: MODELS 1350R, 1500R & 1650R

STAGE 3A YANMAR DIESEL ENGINES

1350R	34.5 kW	146 Nm
1500R	34.5 kW	146 Nm

STAGE 3B YANMAR DIESEL ENGINES

1650R	52.1 kW	241 Nm
-------	---------	--------



LEVEL II FOPS

Robust operator station design provides added protection for the operator.

CAB-FORWARD DESIGN

All-new cab design is mounted forward on the chassis and the seat is mounted higher for exceptional visibility to the front, rear, sides and cutting edge.

EASY ACCESS HYDRAULICS

Auxiliary hydraulics mounted on the top of the lift arm for easy access and fast attachment connect and disconnect.



RATED OPERATING CAPACITY

	STANDARD	COUNTERWEIGHT
1350R	612 kg	680 kg
1500R	680 kg	748 kg
1650R	748 kg	816.5 kg



HYDRAULIC FLOW

1350R 64.4 L/min
1500R 64.4 L/min
1650R 71.4 L/min

DURABLE CYLINDERS

Induction-hardened, chrome-plated rods are used for lift and tilt cylinders, providing added durability.

LOW-PROFILE LIFT ARM

New lift arm increases the width between cylinders for better entry and sight lines.

LIFT HEIGHT

1350R 2784 mm
1500R 3012 mm
1650R 3023 mm

SELECTABLE SELF-LEVELING

Hydraulic self-leveling with on-off control for the operator is available as an option.

DIGITAL COLOR DISPLAY

This information center shows real time fuel consumption, engine RPM, machine hours, engine diagnostic codes, warning indicators and much more.



LARGE-FRAME SKID STEER LOADERS

▲ **POWER** and ▲ **PERFORMANCE**

SUPERIOR SKID STEERS: MODELS 1900R, 2200R & 2600R

STAGE 3B YANMAR DIESEL ENGINES

1900R	51.7 kW	241 Nm
2200R	53.7 kW	294 Nm
2600R	53.7 kW	294 Nm

LEVEL II FOPS

Robust operator station design provides added protection for the operator.

CAB-FORWARD DESIGN

All-new cab design is mounted forward on the chassis and the seat is mounted higher for class-leading visibility to the front, rear, sides and cutting edge.

RADIAL-PISTON DRIVE MOTORS

Maintenance-free, radial-piston drive motors provide high start-up torque and maximum ground speed up to 20 km/hr for quick acceleration.



LONG WHEELBASE

A long wheelbase provides a smoother ride and a lower center of gravity for added stability.

1900R	1067 mm
2200R	1092 mm
2600R	1257 mm

RATED OPERATING CAPACITY

	STANDARD	COUNTERWEIGHT
1900R	862 kg	957 kg
2200R	998 kg	1075 kg
2600R	1179 kg	1261 kg





LOW-PROFILE LIFT ARM

A high-strength, low-profile design maximizes operator visibility to the front and side for added performance and safety.

LIFT HEIGHT

1900R	3061 mm
2200R	3124 mm
2600R	3124 mm

SELECTABLE SELF-LEVELING

Hydraulic self-leveling with on-off control for the operator is available as an option.



BETWEEN-THE-TIRE

design keeps machine length short and compact. *Model 1900R*



OVER-THE-TIRE

design provides wider access and improved visibility. *Models 2200R and 2600R*

VERTICAL LIFT SKID STEER LOADERS

▲ POWER and ▲ PERFORMANCE

VERTICAL LIMIT: MODELS 2700V NXT2 & 3300V NXT2

STAGE 3B YANMAR DIESEL ENGINES

2700V NXT2	53.7 kW	294 Nm
3300V NXT2	53.7 kW	294 Nm

VERTICAL-LIFT BOOM

High-strength, low-profile design increases operator visibility and lifts the load in a nearly vertical path on the 2700V NXT2 and 3300V NXT2.

FUEL ECONOMY

Equipped with an electronic engine control and electronic hand and foot throttles*, these units can be operated at partial throttle for lower sound levels and reduced fuel consumption.

LEVEL II FOPS

Robust operator station design provides added protection for the operator.

CAB-FORWARD DESIGN

All-new cab design is mounted forward on the chassis and the seat is mounted higher for exceptional visibility to the front, rear, sides and cutting edge.

LONG WHEELBASE

A long wheelbase provides a smoother ride and a lower center of gravity for added stability.

2700V NXT2	1257 mm
3300V NXT2	1257 mm

RATED OPERATING CAPACITY

STANDARD		COUNTERWEIGHT
2700V NXT2	1225 kg	1361 kg
3300V NXT2	1497 kg	N/A



*foot throttle not available with hand/foot controls



SELECTABLE SELF-LEVELING

Hydraulic self-leveling with on-off control for the operator is available as an option. Models 2700V NXT2 & 3300V NXT2



“SOFT-SHIFT” DRIVE

Standard two-speed “soft-shift” drive provides smooth transitions between low/high speeds for increased operator comfort.

SMOOTH OPERATION

Hydraglide™ ride control system allows the lift arm to “float” when transporting loads, minimizing loss of material, and increased operator comfort.

LIFT HEIGHT

2700V NXT2	3310 mm
3300V NXT2	3332 mm

SELF-LEVELING

This option keeps the bucket level throughout the raise/lift cycle and can be turned on and off by a switch in the cab.




OPERATOR STATION

▲ COMFORT and ▲ SAFETY

GET IN CONTROL



HAND/FOOT

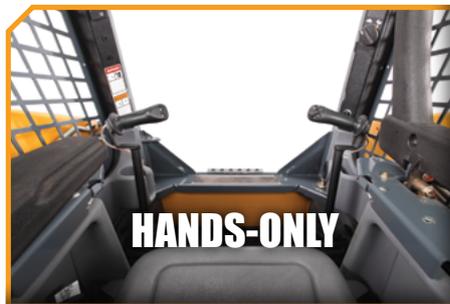

HANDS-ONLY



DUAL-HAND/JOYSTICK



CHOOSE YOUR RIDE

A high-back, five-way adjustable seat comes as standard. Optional air-ride suspension seat or mechanical suspension seat provide enhanced comfort.

DIGITAL COLOR DISPLAY

This information center shows real time fuel consumption, engine RPM, machine hours, engine diagnostic codes, warning indicators and much more. *Models 1350R, 1500R & 1650R*



OPERATOR STATION COMFORT FEATURES



POWER PORT

Standard 12-volt accessory plug keeps you charged up all day.



CLIMATE CONTROL

Heat is standard on all cab models. Air conditioning is an option on select models.



RADIO OPTION

Factory installed, this radio option customizes your cab.



SOUND REDUCTION MATERIAL

Suppresses outside noise for a quieter operator environment.

MULTIPLE AIR VENTS

Six adjustable vents throughout the cab provide optimal temperature control.

ADJUSTABLE SEAT

PADDED, ADJUSTABLE ARMRESTS

OPERATOR PRESENCE

The machine safety system allows operation only when the user is on the seat and the restraint bar is lowered into position.

51 mm SEATBELT

Optional 76 mm seatbelt available.

CUP HOLDER

ADJUSTABLE CONTROL TOWERS

extend and retract to provide personalized comfort.

R Series and Vertical-Lift Model Cab Shown

PRESSURIZED CAB

An optional pressurized, sealed cab enclosure provides a cleaner, quieter operating environment.

EASY ENTRY AND EXIT

Large entry area allows for easy access to the operator station.

VISIBILITY

Wide opening in the front of the machine and large screen windows provide high visibility for increased safety and precise placement.

SERVICE & SAFETY

▲ MAINTENANCE and ▲ SAFETY



EXCELLENT VISIBILITY

FRONT

Model 1350R shown



LEFT SIDE



REAR



RIGHT SIDE

EXCELLENT VIEWS FROM ALL SIDES FOR SAFETY AND PRECISE OPERATION

Excellent visibility to the front, sides and rear of the machine allow for precise placement of loads and reduced jobsite incidents. A high-mounted seat provides an excellent vantage point to the attachment and cutting edge.



16

LESS DOWN TIME PUTS MONEY IN YOUR POCKET

SWING-OUT COOLER

provides improved access to engine bay area. Available on select models.



SWING-OUT REAR DOOR

Rear door easily opens on hinges on right side, allowing full access to filters and fluid reservoirs for servicing and maintenance.

LARGE ENGINE COVER

Cover is hinged and positioned by gas-springs to assist lifting and holding in place, and allows for easy return to closed position.

SAFETY RESTRAINTS

Innovative restraints allows for safe and secure holding of the lift arm and cab while in the maintenance position.

TILTABLE ROPS/FOPS ASSEMBLY

with gas-spring assist for easy internal access to the pumps, hydraulic valve bank and drive motors.

FRONT CHASSIS CLEANOUT

Easy cleanout of foot area inside ROPS/FOPS.

HYDRAULICS & ATTACHMENTS

▲ PERFORMANCE and ▲ VERSATILITY

SELECTABLE SELF-LEVELING HYDRAULIC LIFT ACTION

keeps the bucket level throughout the raise/lift cycle. *Available on select models.*

ELECTRONIC ATTACHMENT CONTROL OPTION

This factory-installed add-on allows for control of all attachments.



PRECISION CONTROL

Standard proportional auxiliary hydraulic control gives the operator the ability to adjust attachment speeds with infinitely adjustable flow control. *Available on select models.*

Standard auxiliary detent (at full flow) allows the operator to set the hydraulic flow for continuous operation. *Available on select models.*

STANDARD AUXILIARY HYDRAULIC FLOW RATES

2012	38.2 L/min	1350R	64.4 L/min	1900R	70 L/min	2700V NXT2	89 L/min
2026	55 L/min	1500R	64.4 L/min	2200R	89 L/min	3300V NXT2	89 L/min
		1650R	71.4 L/min	2600R	89 L/min		



GET ATTACHED

With a wide variety of attachments available, Mustang Skid Steer Loaders are easily transformed to meet your customers' needs.

PALLET FORKS



ROCK BUCKET



TRENCHER



RAKE



SNOW REMOVAL



AUGER



STUMP GRINDER



ROTOTILLER



MOWER



GRAPPLE BUCKET



GRADER BLADE



ANGLE BROOM



ALL-TACH®

All models feature the easy-to-use All-Tach® (universal-style) attachment mounting system compatible with most allied attachments.

SINGLE LEVER DESIGN for simplicity and strength.

HEAVY DUTY MOUNTING PLATE design for increased rigidity over tube style.



POWER-A-TACH®


Hydraulic Power-A-Tach® all-weather system option allows users to quickly install and remove attachments. An operator leaves the seat only to connect auxiliary hydraulics. This system is compatible with most allied attachments.



ACCESSORIES

CUSTOMIZE YOUR RIDE

Mustang offers a variety of accessories and upgrades that can be easily added to new or used equipment. These can help enhance an existing unit or customize one for a particular job. Whether you are looking to add a counterweight, boost your hydraulics, or enclose a cab with heat and air conditioning, Mustang has the tools you need to craft your ideal ride.

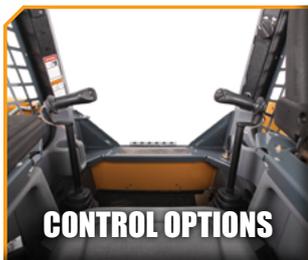

PROTECT YOUR INVESTMENT

Trust the experts.
Make the *right* choice.

You expect year-to-year productivity from your Mustang equipment. That's why your trained and accredited Mustang dealer offers you the experience and skill necessary to maximize your equipment's performance. From routine maintenance to XPRT Genuine Parts to XPRT Protection Plan, your Mustang dealer is a partner you can count on to keep your equipment running smoothly.



XPRT
GENUINE PARTS

ROUTINE Maintenance



Eliminate unexpected repair costs and take better care of your Mustang equipment with the XPRT Protection Plan®. It ensures repairs will be made quickly with manufacturer-approved XPRT genuine parts by trained mechanics. If you're interested in saving money over the long haul, the XPRT Protection Plan® is an investment you should consider.

Features include:

- Affordable options available to meet your needs
- Select either powertrain component or full machine coverage for the right kind of protection for your equipment
- You decide the number of years and hours of coverage needed
- Enroll in the Plan on the day you purchase eligible equipment, or any time within six months or 500 hours from equipment registration

XPRT
PROTECTION PLAN

MUSTANG

SPECIFICATIONS

		2012	1050R	2041	1350R	1500R	1650R
DIMENSIONS	A. Overall Operating Height – Fully Raised	3167 mm	2546 mm	3584 mm	3655 mm	3876 mm	3876 mm
	B. Height to Hinge Pin – Fully Raised	2438 mm	2746 mm	2794 mm	2784 mm	3023 mm	3023 mm
	C. Overall Height to Top of ROPS	1897 mm	1786 mm	1826 mm	1908 mm	1948 mm	1948 mm
	D. Overall Length with Bucket	2576 mm w/ 914 mm Bucket	2896 mm w/ 1397 mm Bucket	2896 mm w/ 1397 mm Bucket	3056 mm w/ 1372 mm Bucket	3101 mm w/ 1562 mm Bucket	3101 mm w/ 1562 mm Bucket
	E. Dump Angle at Full Height	46°	42°	42°	40°	38°	38°
	F. Dump Height	1836 mm	2146 mm	2197 mm	2098 mm	2380 mm	2380 mm
	G. Dump Reach at Full Height	376 mm	579 mm	574 mm	577 mm	579 mm	579 mm
	J. Rollback at Ground	23°	29°	29°	29°	28°	28°
	M. Rollback Angle at Full Height	100°	99°	99°	82°	99°	99°
	O. Seat to Ground Height	879 mm	828 mm	853 mm	846 mm	904 mm	904 mm
	P. Wheelbase	775 mm	876 mm	932 mm	955 mm	988 mm	988 mm
	Q. Overall Width - Less Bucket ^A	909 mm	1229 mm	1346 mm ^Y / 1499 mm	1329 mm	1544 mm	1544 mm
	R. Bucket Width	914 mm	1404 mm	1539 mm	1372 mm	1562 mm	1562 mm
	S. Ground Clearance to Chassis	150 mm	152 mm	211 mm	201 mm	160 mm	160 mm
	V. Overall Length - Less Bucket	1905 mm	2258 mm	2314 mm	2342 mm	2385 mm	2385 mm
	W. Departure Angle	30°	26°	29°	25°	21°	21°
	X. Clearance Circle – Front w/ Bucket	1473 mm	1763 mm	1758 mm	1842 mm	1869 mm	1869 mm
	Y. Clearance Circle – Front w/o Bucket	833 mm	1120 mm	1120 mm	1130 mm	1153 mm	1153 mm
	Z. Clearance Circle – Rear	1097 mm	1374 mm	1484 mm	1372 mm	1466 mm	1466 mm
	Standard Specification Tire Size	5.70 x 12	27x8.5x15 HD	27x8.5x15 HD	10.00x16.5 HD	10.00x16.5 HD	10.00x16.5 HD
ENGINE	Make	Yanmar	Yanmar	Yanmar	Yanmar	Yanmar	Yanmar
	Model	3TNV82A-BPMSR Stage 3A	3TNV88-BKMSR Stage 3A	4TNV88-BKMSR Stage 3A	4TNV88-BKMSR2 Stage3A	4TNV88-BKMSR2 Stage3A	4TNV98-ZNMS3R Stage 3B
	Gross Power @ rpm	18.1 kW @2800	25.5 kW @2800	35 kW @ 2600	34.5 kW @ 2800	34.5 kW @ 2800	52 kW @ 2500
	Net Power (kW) @ rpm	17.8 kW @ 2400	24.7 kW @2800	36 kW @ 2600	33 kW @ 2800	33 kW @ 2800	51 kW @ 2500
	Maximum Torque @ rpm	86 Nm @ 1200	108 Nm @ 1680	145 Nm @ 1680	146 Nm @ 1680	146 Nm @ 1680	241 Nm @1625
	Displacement	1.3 L	1.6 L	2.2 L	2.19 L	2.19 L	3.3 L
HYDRAULIC SYSTEM	Auxiliary Hydraulics – Standard	38.2 L/min	55 L/min	62 L/min	64.4 L/min	64.4 L/min	71.4 L/min
	High-Flow Auxiliary Hydraulics – Option	N/A	N/A	N/A	N/A	N/A	94.6 L/min
	Reservoir Capacity	27.3 L	30.3 L	30.3 L	37.9 L	41.6 L	41.6 L
ELECTRICAL SYSTEM	Battery	650 CCA	675 CCA	675 CCA	950 CCA	950 CCA	950 CCA
	Starter	1.7 kW	2.3 kW	2.3 kW	3.0 kW	3.0 kW	3.0 kW
	Alternator	40-amp	40-amp	40-amp	100-amp	100-amp	100-amp
CAPACITIES / WEIGHTS	Rated Operating Capacity ^B	386 kg	476 kg	612 kg	612 kg	680 kg	748 kg
	Rated Op. Capacity with Opt. Counterweight ^B	N/A	533 kg	669 kg	680 kg	748 kg	816.5 kg
	Fuel Tank	29 L	39.4 L	46.9 L	62.5 L	62.5 L	62.5 L
	Travel Speed – Maximum	8.9 km/hr	9.5 km/hr	8.7 km/hr	12.9 km/hr	11.9 km/hr	12.6 km/hr
	Travel Speed w/ Two-Speed Option - Maximum	N/A	N/A	N/A	N/A	N/A	19.5 km/hr
	Operating Weight ^C – Approximate	1352 kg	1905 kg	2087 kg	2327 kg	2690 kg	2796 kg
SOUND/ VIBRATION*	Noise Level / Environmental Level (EU Dir. 00/14/EC)	101 dB(A)	101 dB(A)	101 dB(A)	101 dB(A)	101 dB(A)	101 dB(A)
	Operator Ear (EU Dir. 2006/42/EC)	85 dB(A)	80 dB(A)	85 dB(A)	85 dB(A)	85 dB(A)	85 dB(A)
	Whole-Body Vibration (ISO 2631-1)	1.05 m/s ²	0.81 m/s ²	1.12 m/s ²	1.12 m/s ²	0.79 m/s ²	0.9 m/s ²
	Hand-Arm Vibration (ISO 5349-1)	1.53 m/s ²	0.93 m/s ²	1.93 m/s ²	1.93 m/s ²	1.70 m/s ²	1.77 m/s ²


* Standard seat option and dual hand controls



1900R	2200R	2600R	2700V NXT2	3300V NXT2
4013 mm	4089 mm	4089 mm	4252 mm	4369 mm
3061 mm	3124 mm	3124 mm	3310 mm	3332 mm
2032 mm	2057 mm	2057 mm	2057 mm	2083 mm
3226 mm w/ 1676 mm Bucket	3467 mm w/ 1778 mm Bucket	3632 mm w/ 1778 mm Bucket	3759 mm w/ 1778 mm Bucket	3874 mm w/ 1880 mm Bucket
42°	40°	40°	42°	42°
2311 mm	2388 mm	2388 mm	2540 mm	2502 mm
572 mm	686 mm	686 mm	813 mm	813 mm
26°	28°	28°	29°	29°
96°	95°	95°	94°	94°
991 mm	1016 mm	1016 mm	1016 mm	1041 mm
1067 mm	1092 mm	1257 mm	1257 mm	1257 mm
1638 mm	1758 mm	1758 mm	1758 mm	1816 mm
1676 mm	1778 mm	1778 mm	1778 mm	1880 mm
165 mm	203 mm	203 mm	203 mm	229 mm
2388 mm	2667 mm	2832 mm	2959 mm	3023 mm
25°	25°	25°	25°	25°
2007 mm	2223 mm	2286 mm	2286 mm	2400 mm
1130 mm	1321 mm	1422 mm	1422 mm	1422 mm
1486 mm	1524 mm	1626 mm	1689 mm	1765 mm
10.00x16.5 HD	12.00x16.5 HD	12.00x16.5 HD	12.00x16.5 HD	14.00x17.5 HD
Yanmar	Yanmar	Yanmar	Yanmar	Yanmar
4TNV98C-XNMS Stage 3B				
51.7 kW @ 2500	53.7 kW @ 2500			
51 kW @ 2500	52.7 kW @ 2500	52.7 kW @ 2500	52.7 kW @ 2500	52.7 kW @ 2500
241 Nm @ 1625	294 Nm @ 1625			
3.3 L				
70 L/min	90 L/min	90 L/min	89 L/min	89 L/min
119 L/min	132.5 L/min	132.5 L/min	132 L/min	132 L/min
30.3 L	30.3 L	30.3 L	40 L	40 L
950 CCA				
3.0 kW				
95-amp	95-amp	95-amp	95-amp	95-amp
862 kg	998 kg	1179 kg	1225 kg	1497 kg
957 kg	1075 kg	1261 kg	1361 kg	N/A
62.5 L	68.1 L	81.4 L	92.7 L	92.7 L
12.1 km/hr	12.9 km/hr	12.9 km/hr	12 km/hr	13 km/hr
20.1 km/hr	19.2 km/hr	19.2 km/hr	19.2 km/hr	19.6 km/hr
3121 kg	3620 kg	3719 kg	3697 kg	4123 kg
101 dB(A)				
85 dB(A)				
0.80 m/s ²	0.96 m/s ²	0.96 m/s ²	1.07 m/s ²	1.07 m/s ²
1.30 m/s ²	1.50 m/s ²	1.50 m/s ²	1.50 m/s ²	1.50 m/s ²


REFERENCE DIAGRAMS

RADIAL-LIFT

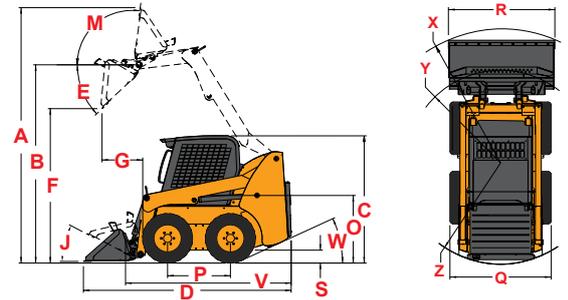

VERTICAL-LIFT

2700V NXT2 / 3300V NXT2

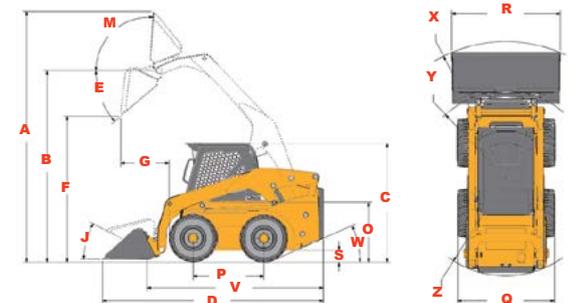

- A Overall width is dependent upon the amount of wheel offset.
- B Per SAE J818, SAE J732, and ISO 14397
- C Weight of base unit with standard equipment, standard tires (heavy-duty flotation), standard dirt-construction bucket and 79 kg operator.

ORIGINAL WORKHORSE

Mustang authorized dealers offer a full line of compact equipment, backed up by exceptional sales, service and parts experience.

For more information on Mustang equipment, visit mustangmfg.com

Mustang reminds users to read and understand the operator's manual before operating any equipment. Also, make sure all safety devices and shields are in place and functioning properly.

Mustang reserves the right to add improvements or make changes in specifications at any time without notice or obligation.



Mustang Mfg

¹ Adjustable control towers and armrests available on joystick and hand/foot control configurations only.

² Foot throttle on hand control units only.

³ Hydraglide™ Ride Control is standard with pilot controls and hands only controls.

⁴ Regional regulations apply.



MILE

Rue des Andains, 2, B-1360 Perwez
Tel: +33 240092162

○ STANDARD ● OPTIONAL

	2012	1050R	2041	1350R	1500R	1650R	1900R	2200R	2600R	2700V NXT2	3300V NXT2
CONTROLS											
Hands-Only	○	○	○	●	●	●					
Dual-Hand Controls							●	●	●	●	●
Hand/Foot Controls		○	○	●	●	●	●	●	●	●	●
Joystick Controls						●	●	●	●	●	●
ENGINE											
Engine Auto-Shutdown System			●	○	○	○	○	○	○	○	○
Engine Block Heater	●	○	●	●	●	●	●	●	●	●	●
Turbo-Charged Engine							○	○	○	○	○
Swing-out Cooler				○	○	○					
HYDRAULICS											
Auxiliary Hydraulics	○	○	○	○	○	○	○	○	○	○	○
High-Flow Auxiliary Hydraulics							●	●	●	●	●
OPERATOR STATION											
Adjustable Arm Rests / Control Towers ¹							○	○	○	○	○
Heating	●	●	●	●	●	●	●	●	●	●	●
Air Conditioning							●	●	●	●	●
High-Back Adjustable Seat	○	○	○	○	○	○	○	○	○	○	○
Suspension Seat - Mechanical	●	●	●	●	●	●	●	●	●	●	●
Suspension Seat - Air Ride				●	●	●	●	●	●	●	●
Cab Enclosure	●	●	●	●	●	●	●	●	●	●	●
Foot and Hand Throttles ²	○	○	○	○	○	○	○	○	○	○	○
Full Instrumentation		○	○	○	○	○	○	○	○	○	○
Horn	●	●	●	○	○	○	○	○	○	○	○
Integral Access Plate (removable)	○	○	○	○	○	○	○	○	○	○	○
Operator Restraint Bar	○	○	○	○	○	○	○	○	○	○	○
ROPS/FOPS Level II Overhead Guard	○	○	○	○	○	○	○	○	○	○	○
Sound Reduction Material		○	●	○	○	○	○	○	○	○	○
Work Lights - Front and Rear	○	○	○	○	○	○	○	○	○	○	○
PERFORMANCE											
All-Tach® Attachment Mounting System	○	○	○	○	○	○	○	○	○	○	○
Power-A-Tach® Attachment Mounting System				●	●	●	●	●	●	●	●
Anti-Vandalism Protection	○	○	○	○	○	○	○	○	○	○	○
Back-Up Alarm	●	●	●	●	●	●	●	●	●	●	●
Brake Control (Auto / Manual)	○	○	○	○	○	○	○	○	○	○	○
Counterweight		●		●	●	●	●	●	●	●	○
Hydraglide™ Ride Control ³					●	●	●	●	●	○	○
Hydraloc™ Safety System	○	○	○	○	○	○	○	○	○	○	○
Hydrostatic Drive	○	○	○	○	○	○	○	○	○	○	○
Lift Arm Support Device	○	○	○	○	○	○	○	○	○	○	○
Switchable Self-Leveling Hydraulic Lift Action	●	●	●	●	●	●	●	●	●	●	●
Two-Speed Drive						●	●	●	●	●	○